



DB9 TO RJ12 ADAPTER

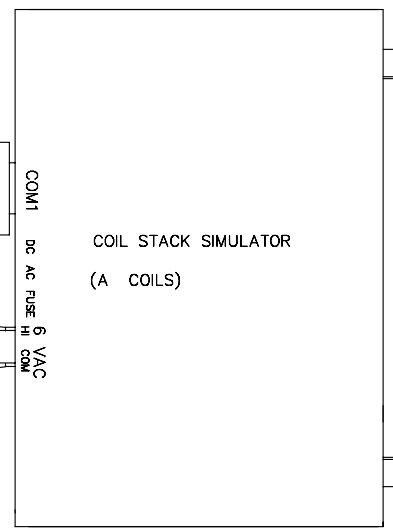


DETECTOR/ENCODER CARD

DATA CABINET A

6VAC POWER CABLE

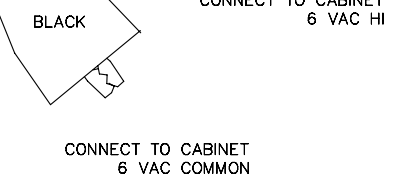


RJ12-RJ12 DATA CABLE  
7' OR 25'

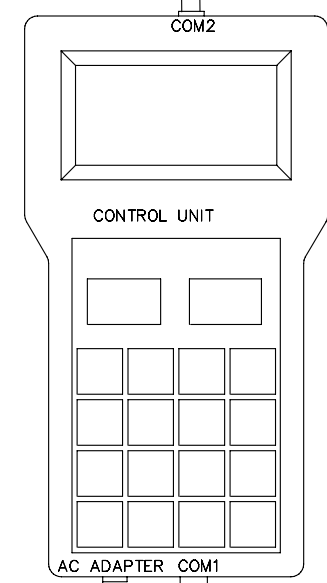

AC ADAPTER IS NORMALLY NOT NEEDED. CONTROL UNIT OBTAINS POWER FROM CABINET 6 VAC COIL POWER THROUGH SIMULATOR VIA DATA CABLE

CONTROL UNIT COM1 AND COM2 ARE INTERCHANGEABLE. EITHER SIMULATOR MAY BE CONNECTED TO EITHER PORT


DB9 TO RJ12 ADAPTER

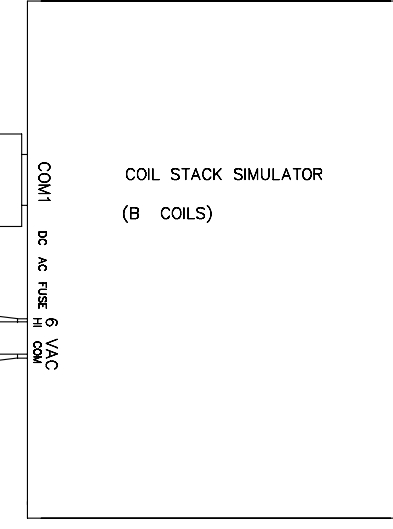

DETECTOR/ENCODER CARD

DATA CABINET B

6VAC POWER CABLE

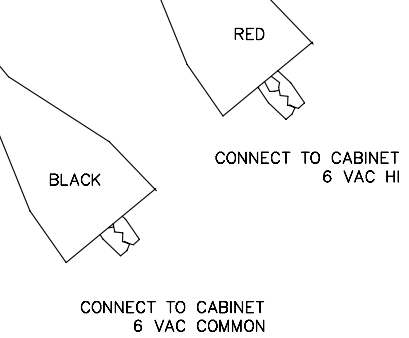

RJ12-RJ12 DATA CABLE  
7' OR 25'

CAMP CREEK TECHNOLOGIES  
DETECTOR/ENCODER CARD TESTER  
FIELD TESTING  
CONFIGURATION

DRAWN	GES	4/26/07	SCALE	1"=1"
APPR			FILE	200607-02
NO.		REVISION	DRWN	APPR
E		200607-02	DATE	REV
		0		